



PLAN

Notes:

1. Manufactured in accordance with:
 - OPSD 911.160 and 911.161
 - OPSS 1350
 - OPSS 1352
 - Special Provision No. 740S06
2. Reinforcing and connectors as per OPSD 911.160 and 911.161.
3. Concrete strength: 35 MPa @ 28 days min.
4. Concrete cover 50mm minimum.
5. Drawing refers to precast component only.
6. Weight = 2,250 kgs
7. All dimensions in millimetres unless otherwise noted.

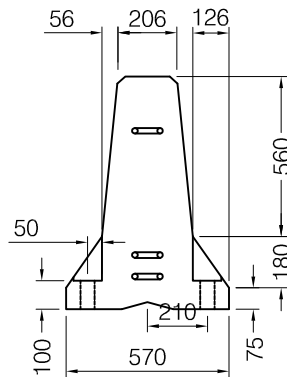

END VIEW DETAIL
END A

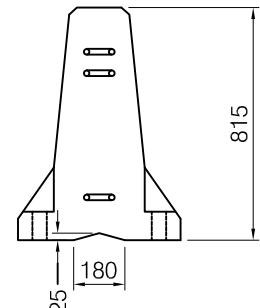

END VIEW DETAIL
END B

DWG. No.
M CON 911.160

TOLERANCE:
AS PER SPECIAL PROVISION
740S06

NOTES:
MIN CONG STRENGTH: 35 MPA
CONG STRIPPING STRENGTH: 20 MPA
CLEAR COVER: 50MM MIN.
MIX DESIGN NO. 996/45
IN COMPLIANCE WITH: SP NO. 740S03

MCON PIPE & PRODUCTS STANDARD DRAWING

STD: OPSD - 911.160

PRODUCT CODE:

TITLE:

PRECAST CONCRETE BARRIER
TYPE M CONNECTION
OPSD 911.160

| REV | DESCRIPTION | ENG | DATE |
|-----|-------------|-----|------|
| | | | |
| | | | |
| | | | |

| | | | | |
|---------------------|---------------------|-----------------------|------|----------------|
| DRAWING BY: S.K. | CHECKED BY: S.K. | DATE JUNE 9TH 2012 | FILE | PAGE 1 OF 1 |
|---------------------|---------------------|-----------------------|------|----------------|