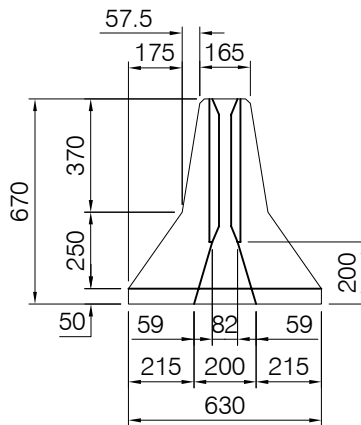
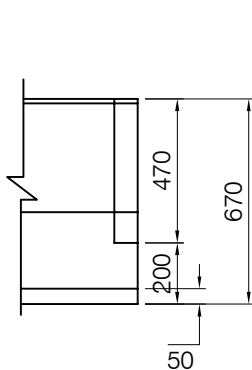
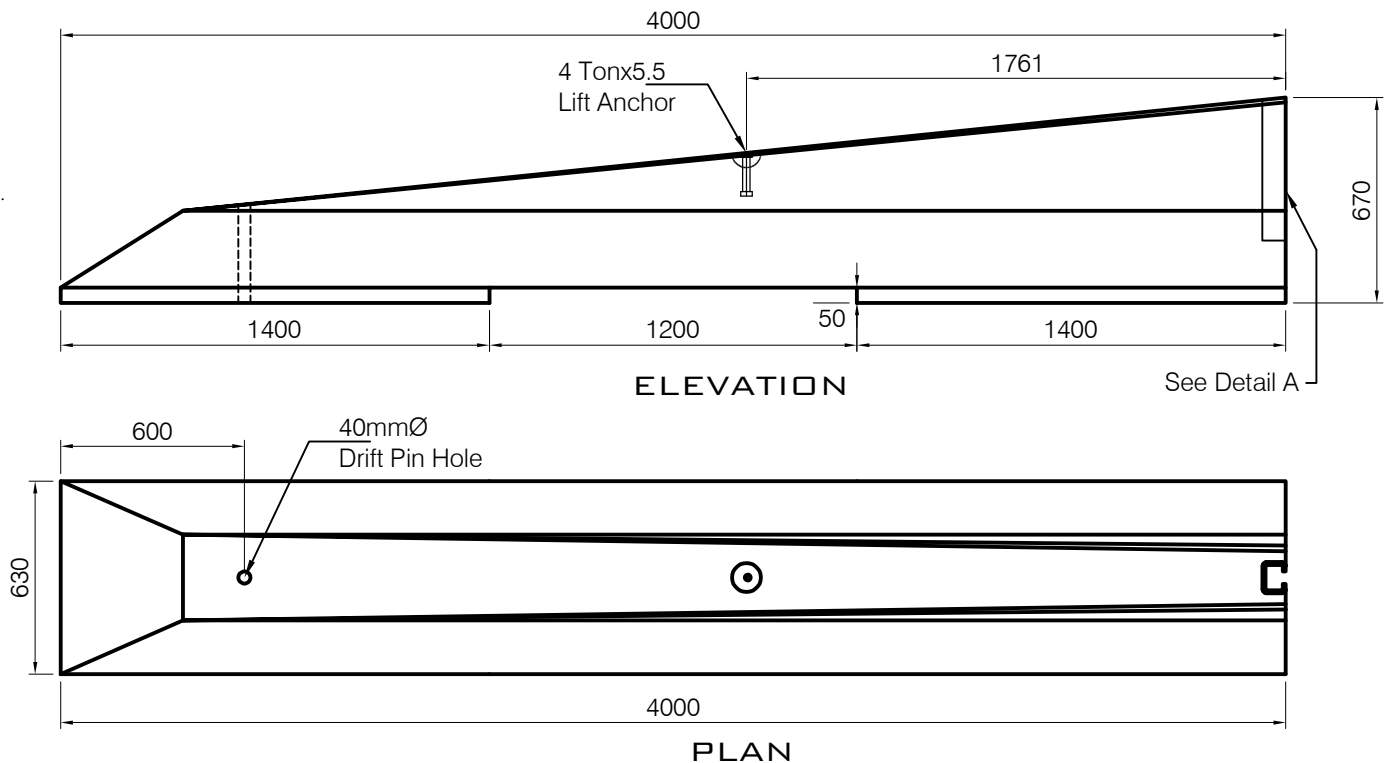


Notes:

- Manufactured in accordance with:
 - OPSD 911.233
 - OPSS 1350
 - OPSS 1352
 - Special Provision No. 740S06
- Reinforcing and connectors as per OPSD 911.140
- Concrete strength: 35 MPa @ 28 days min.
- Concrete cover 50mm minimum.
- Drawing refers to precast component only.
- Weight = 1,726 kgs
- All dimensions in millimetres unless otherwise noted.

DWG. No. **OMNI 911.233**

TOLERANCE: AS PER SPECIAL PROVISION 740S06		NOTES: MIN CONC STRENGTH: 35 MPA CONC STRIPPING STRENGTH: 20 MPA CLEAR COVER: 50MM MIN. MIX DESIGN NO. 996/45 IN COMPLIANCE WITH: SP NO. 740S03	
ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE NOTED			
REV	DESCRIPTION	ENG	DATE

OMNI PRECAST STANDARD DRAWING

STD:	OPSD - 911.233	PRODUCT CODE:	
TITLE:	PRECAST CONCRETE BARRIER TAPERED I LOCK BARRIER - 4.0M OPSD 911.233 BARRIER 1		
DRAWING BY:	CHECKED BY:	DATE:	FILE:
S.K.	S.K.	APRIL 2020	
PAGE			1 OF 1