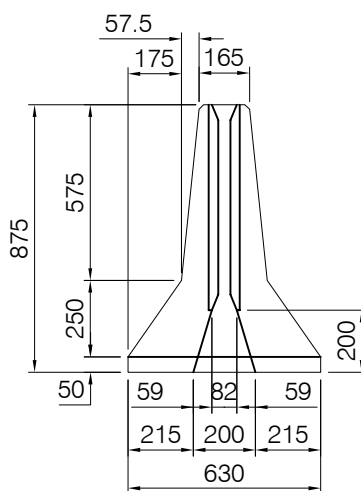
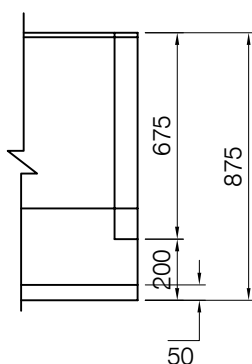
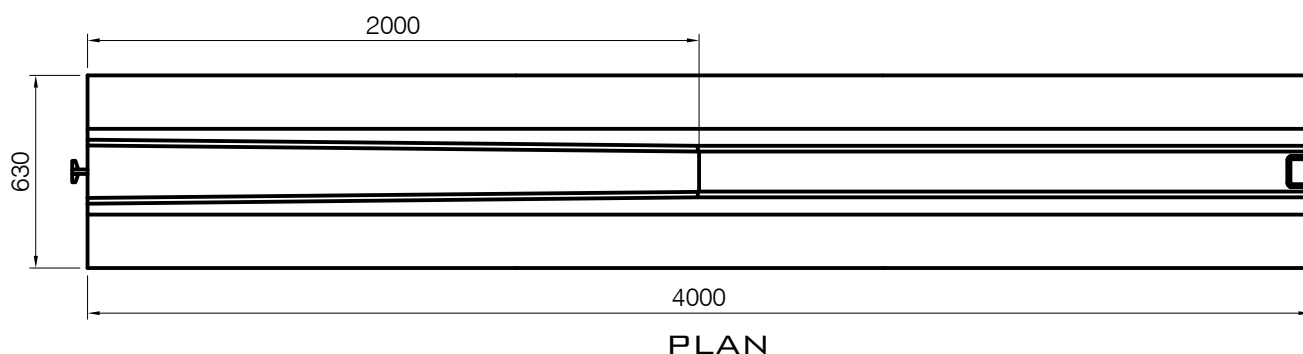
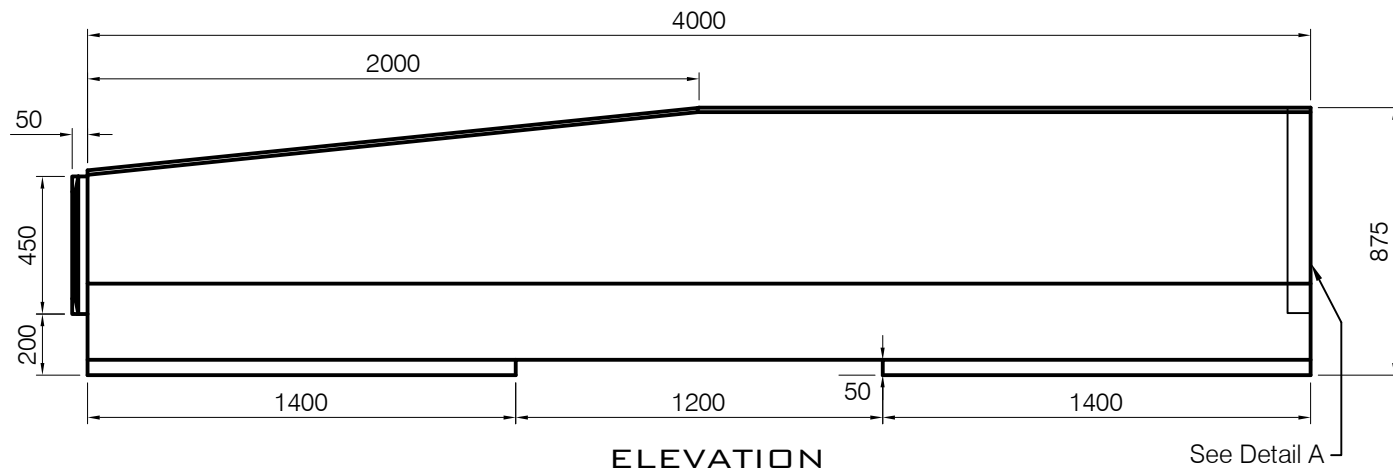


Notes:

1. Manufactured in accordance with:
 - OPSD 911.233
 - OPSS 1350
 - OPSS 1352
 - Special Provision No. 740S06
2. Reinforcing and connectors as per OPSD 911.140
3. Concrete strength: 35 MPa @ 28 days min.
4. Concrete cover 50mm minimum.
5. Drawing refers to precast component only.
6. Weight = 2,554 kgs
7. All dimensions in millimetres unless otherwise noted.

DWG. NO. **OMNI 911.233**

TOLERANCE: AS PER SPECIAL PROVISION 740S06		NOTES: MIN CONC STRENGTH: 35 MPa CONC STRIPPING STRENGTH: 20 MPa CLEAR COVER: 50MM MIN. MIX DESIGN NO. 996/45 IN COMPLIANCE WITH: SP NO. 740S03	
ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE NOTED			
REV	DESCRIPTION	ENG	DATE

OMNI PRECAST STANDARD DRAWING

STD: OPSD - 911.233	PRODUCT CODE:
TITLE: PRECAST CONCRETE BARRIER TRANSITION I LOCK BARRIER - 4.0M OPSD 911.233 BARRIER 2	
DRAWING BY: S.K.	CHECKED BY: S.K.
DATE: APRIL 2020	FILE: © Precast/Prestress Concrete Institute & Ontario Precast/Prestress Concrete Institute 2020/2021
PAGE: 1 OF 1	