




LIFT HOOK - TYP.
ALP-LRA7169G

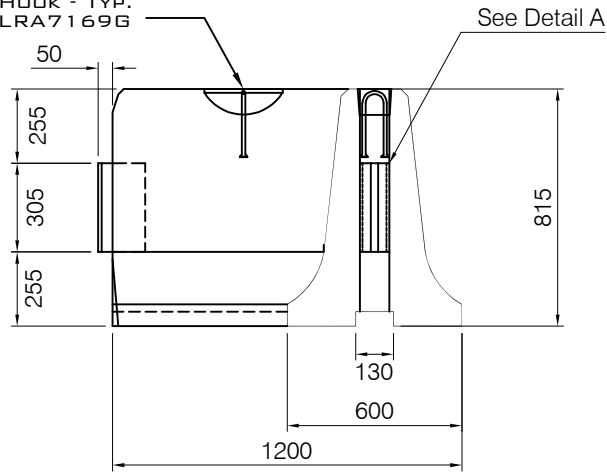


END VIEW DETAIL
FEMALE CONNECTOR

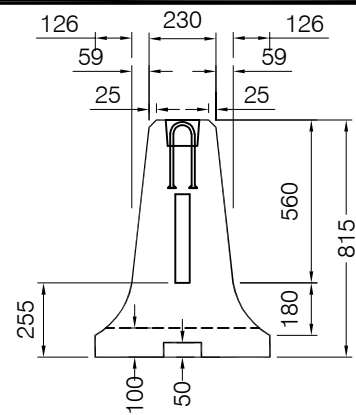

END VIEW DETAIL
MALE CONNECTOR

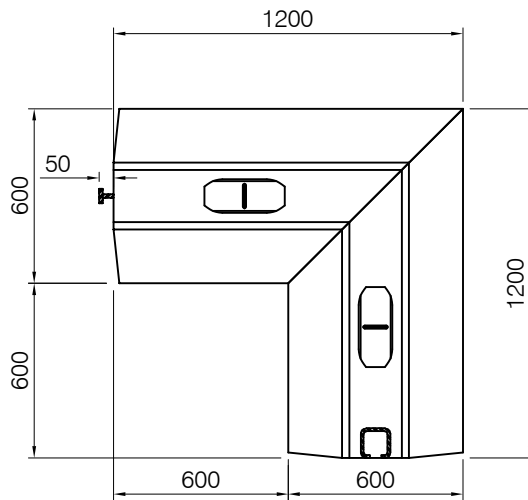

PLAN VIEW

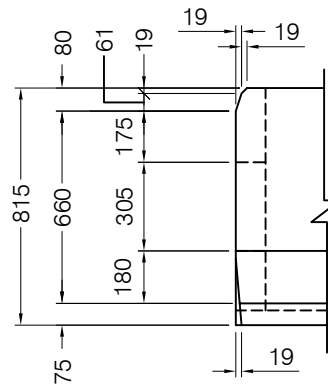

DETAIL A

Notes:

- Manufactured in accordance with:
 - OPSD 911.180
 - OPSS 1350
 - OPSS 1352
 - Special Provision No. 740S06
- Reinforcing and connectors as per OPSD 911.180
- Concrete strength: 35 MPa @ 28 days min.
- Concrete cover 50mm minimum.
- Drawing refers to precast component only.
- Weight = 2,563 kgs
- Lifting Hook - ALP - LRA7169G
- All dimensions in millimetres unless otherwise noted.

TOLERANCE: AS PER SPECIAL PROVISION 740S06		NOTES: MIN CONC STRENGTH: 35 MPA CONC STRIPPING STRENGTH: 20 MPA CLEAR COVER: 50MM MIN. MIX DESIGN NO. 45 IN COMPLIANCE WITH: SP NO. 740S03		OMNI PRECAST STANDARD DRAWING				
ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE NOTED				STD: OPSD - 911.180		PRODUCT CODE:		
				PRECAST CONCRETE BARRIER TYPE T CONNECTION - CORNER MOD. OPSD 911.180 MODIFIED WITH LIFTING HOOK				
REV	DESCRIPTION	ENG	DATE					
				DRAWING BY: S. K.	CHECKED BY: S. K.	DATE JUNE 9TH 2012	FILE	PAGE 1 OF 1