




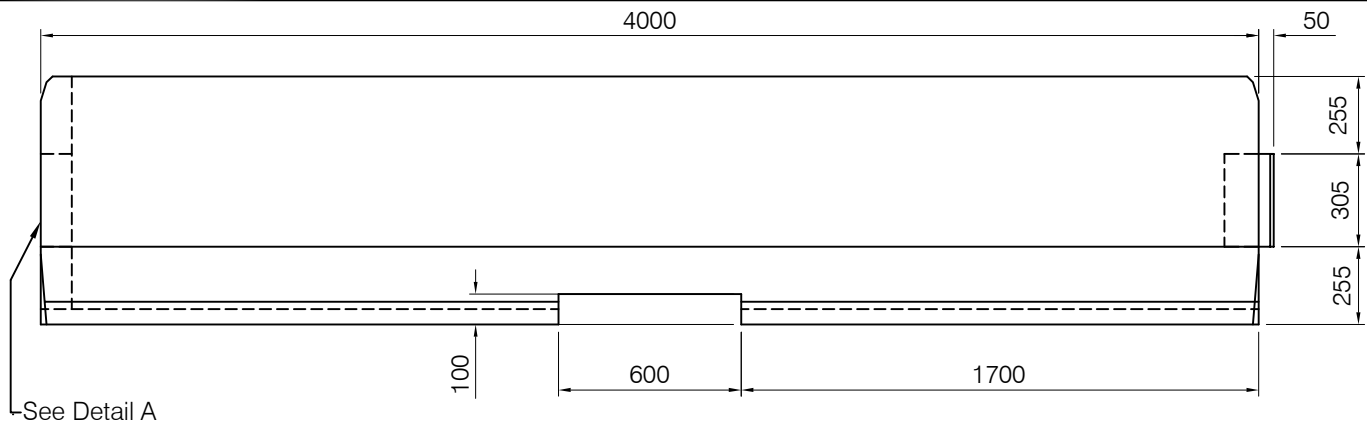


ELEVATION

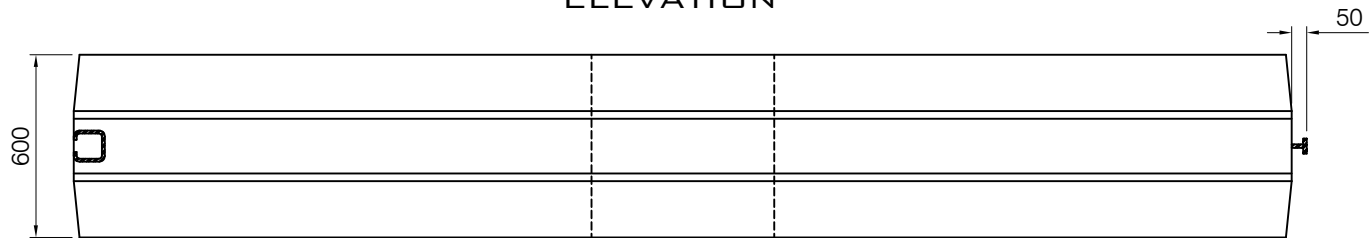


PLAN

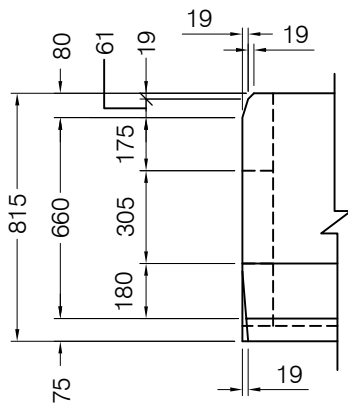

DETAIL A

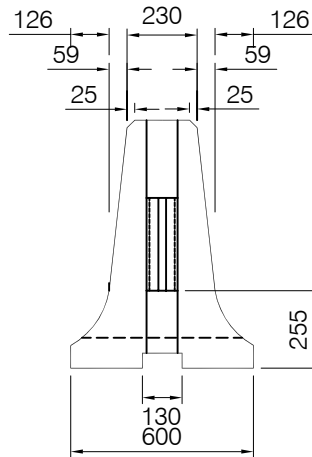

END VIEW DETAIL
FEMALE CONNECTOR

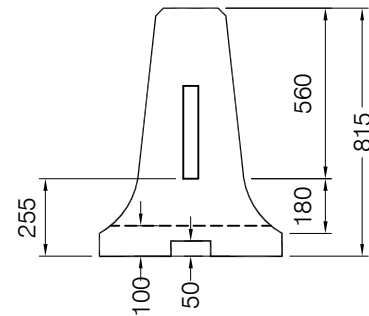

END VIEW DETAIL
MALE CONNECTOR

Notes:

- Manufactured in accordance with:
 - OPSD 911.180
 - OPSS 1350
 - OPSS 1352
 - Special Provision No. 740S06
- Reinforcing and connectors as per OPSD 911.180
- Concrete strength: 35 MPa @ 28 days min.
- Concrete cover 50mm minimum.
- Drawing refers to precast component only.
- Weight = 2,563 kgs
- All dimensions in millimetres unless otherwise noted.

DWG. NO.
M CON 911.180

TOLERANCE: AS PER SPECIAL PROVISION 740S06 ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE NOTED		NOTES: MIN CONC STRENGTH: 35 MPA CONC STRIPPING STRENGTH: 20 MPA CLEAR COVER: 50MM MIN. MIX DESIGN NO. 45 IN COMPLIANCE WITH: SP No. 740S03		OMNI PRECAST STANDARD DRAWING			
REV		DESCRIPTION		ENG	DATE	STD: OPSD - 911.180 TITLE: PRECAST CONCRETE BARRIER TYPE T CONNECTION - 4.0M OPSD 911.180	
						PRODUCT CODE:	
						DRAWING BY: S.K. CHECKED BY: S.K. DATE: JUNE 9TH 2012	
						FILE:	
						PAGE 1 OF 1	