


END A

END B

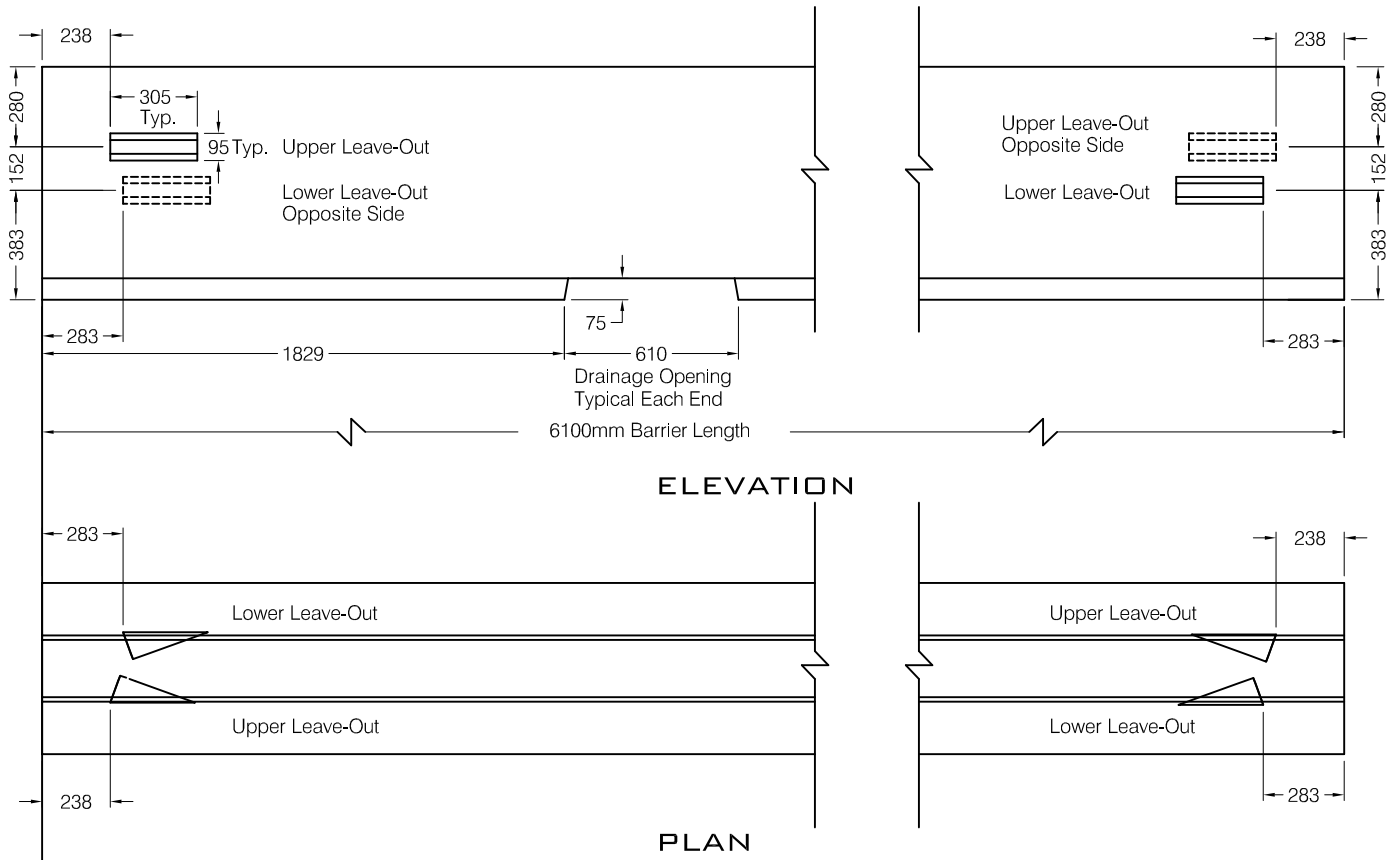


ELEVATION


PLAN

Notes:

1. Manufactured in accordance with:
 - MTOD 911.198, 911.191 and 911.192
 - OPSS 1350
 - OPSS 1352
 - Special Provision No. 741S01
 - OPSS 1440
2. Reinforcing and connectors as per MTOD 911.198, 911.191 and 911.192.
3. Concrete strength: 40 MPa @ 28 days min.
4. Concrete cover 38mm minimum.
5. Drawing refers to precast component only.
6. Weight = 4,138 kgs
7. All dimensions in millimetres unless otherwise noted.

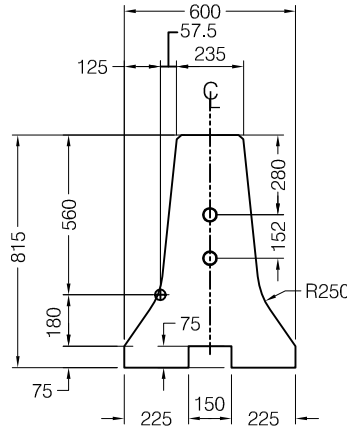

END VIEW DETAIL
END A

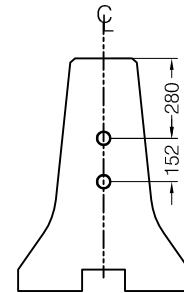

END VIEW DETAIL
END B

DWG. No.
M CON 911.198

TOLERANCE:
AS PER OPSS 741

NOTES:
MIN CONG STRENGTH: 40 MPA
CONG STRIPPING STRENGTH: 20 MPA
CLEAR COVER: 50MM MIN.
MIX DESIGN NO. 45
IN COMPLIANCE WITH: SP NO. 741S01

MCON PIPE & PRODUCTS STANDARD DRAWING

STD: MTOD - 911.198

PRODUCT CODE:

ALL DIMENSIONS ARE IN MM
UNLESS OTHERWISE NOTED

PRECAST CONCRETE BARRIER
TYPE X CONNECTION
MTOD 911.198 - 6.1M LENGTH

REV	DESCRIPTION	ENG	DATE

DRAWING BY: S.K. CHECKED BY: S.K. DATE: JULY 23, 2018 FILE: PAGE: 1 OF 1